Bauer Systemtechnik GmbH, Geschäftsführer: Franz Bauer
Gewerbering 17, D-84072 Au i.d. Hallertau
Tel.: 0049 (0)8752-865809-0, Fax: 0049 (0)8752-9599
E-Mail: info@bauer-tore.de

Absperrpfosten (Feuerwehrpfosten) Stahlrohr 70 x 70 mm herausnehmbar, mit Dreikantverschluss, feuerverzinkt, mit 1 Öse

Barrier posts Steel tube 70 x 70 mm removable, with triangular locking mechanism, hot-dip galvanized, with 1 eyelet

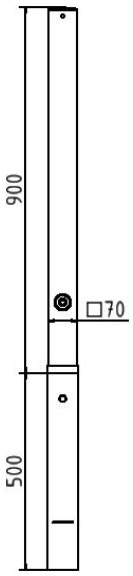

Artikelbeschreibung:

Absperrpfosten (Feuerwehrpfosten) Vierkantrohr 70 x 70 mm mit aufgeschweißter Stahlkappe 900 mm Überflur herausnehmbar, mit Dreikantverschluss nach DIN 3223, selbsteinrastende Verriegelung, mit Bodenhülse Typ 470.10, ca. 500 mm Unterflur, feuerverzinkt, mit 1 Öse

Verwendungszweck:

Zum Sperren, Sichern und Schützen von Bereichen.

Technische Daten:

Gewicht: 12,00 kg/St
Material:
S235 JR

Oberfläche:
Feuerverzinkung nach DIN ISO 1461

item description:

Barrier post square tube 70 x 70 mm with welded steel cap 900 mm above ground removable, with triangular locking mechanism acc. with DIN 3223, self-engaging lock, with gorund socket part-no. 470.10, approx. 500 mm under ground, hot-dip galvanized, with 1 eyelet

designated purpose:

For stopping, and securing or saving of areas.

technical specifications:

weight: 12,00 kg/pc
material:
S235 JR

surface:
hot dipped galvanized acc. to DIN ISO 1461